



M-18000-A 2005 Mustang Damper Kit INSTALLATION INSTRUCTIONS

NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.


Please visit www.fordracingparts.com for the most current instruction information

!!! PLEASE READ ALL OF THE FOLLOWING INSTRUCTIONS CAREFULLY PRIOR TO INSTALLATION. AT ANY TIME YOU DO NOT UNDERSTAND THE INSTRUCTIONS, PLEASE CALL THE FORD RACING TECHLINE AT 1-800-367-3788 !!!

ATTENTION: If camber adjustment is desired, then slotting the strut at the lower mounting plate is an acceptable method.

STEP 1: Using a suitable grinding tool, enlarge the strut to spindle lower mounting holes as indicated in the photo below.

NOTE: Do not enlarge the holes any more than indicated by the etchings on the strut.

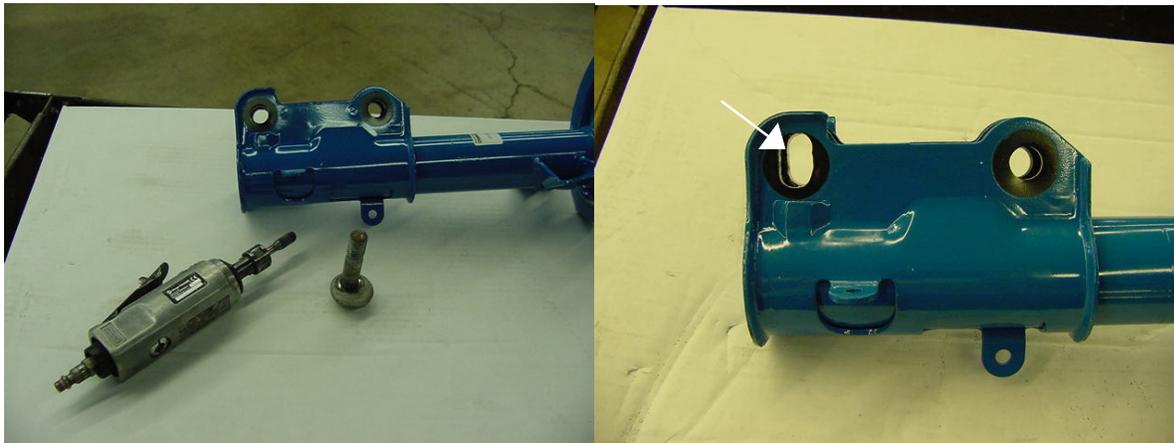

STEP 2: Remove any burrs.

STEP 3: Clean and paint any exposed metal.

STEP 4: Use the supplied cam bolts and nuts to assemble with the desired camber. Torque to 100 Nm (148lb./ft.).

Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356